


CENTURY DESIGN INC.

CD-5880 Four Position Turret Winder

FROM CONCEPT TO COMPLETION

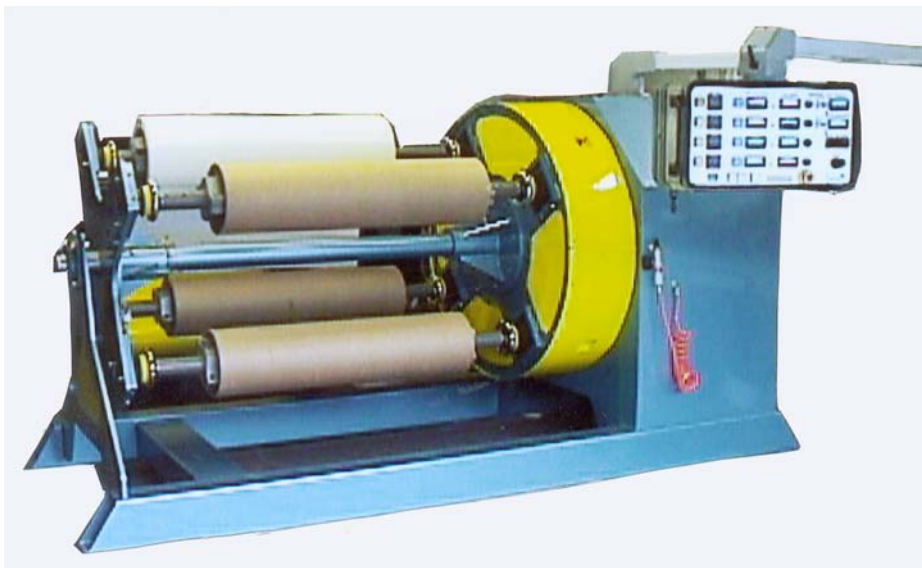

Highlights

- ◆ The CD-5880 Four Position Turret Winder provides tensioned winding of web materials, with speed control integrated to the upstream web production line.
- ◆ 4 winding stations fully supported for larger web widths
- ◆ Direct current motor drive closely matches web line speed through encoder feedback.
- ◆ Web tension provided by precision adjustable air clutches on each winding axis.
- ◆ Multiple axes can be used simultaneously for winding pre-slit product.
- ◆ Material spindles use air shafts with quick release chucks.
- ◆ Air gun and hose provided for quick material loading on air shafts.

3635 Afton Road
San Diego, CA 92123 USA

Phone: 858-292-1212
Fax: 858-292-4635
Email: info@centurydesign.com

Visit our WebSite at

www.centurydesign.com



Specifications

- Line Speed 0—60 ft/min (0—20 m/min)
- Rewind Spool 10" diameter (254 mm)
- Maximum Material Diameter 24" (610 mm)
- Maximum Web Tension 4.5 lb/in (80 gm/mm)
- Material Width Up to 50" (1,270 mm)