

CENTURY DESIGN INC.

CE COMPLIANT

CD-6020 Four Position Turret Winder


FROM CONCEPT TO COMPLETION

Highlights

- The CD-6020 Four Position Turret Winder provides tensioned winding of web materials, with speed control integrated to the upstream web production line.
- Four cantilevered winding stations for easy loading & unloading
- Direct current motor drive closely matches web line speed
- Web tension provided by precision adjustable air clutches on each winding axis
- Two axes can be used simultaneously for winding pre-slit product
- Material spindles use air-bar shafts with quick release
- Air gun & hose provided for quick material loading

• Specifications

- ⇒ Line Speed.....0-65 ft/min (0-m/min)
- ⇒ Rewind Spool.....10" dia (254 mm)
length up to 30" (762 mm)
- ⇒ Max Material Diameter.....24" (610 mm)
- ⇒ Max Material Weight.....300 lb
- ⇒ Maximum Web Tension.....4.5 lb/in (80 gm/mm)
- ⇒ Material Width.....24" (610 mm)
or any combination adding to 24" (610 mm)

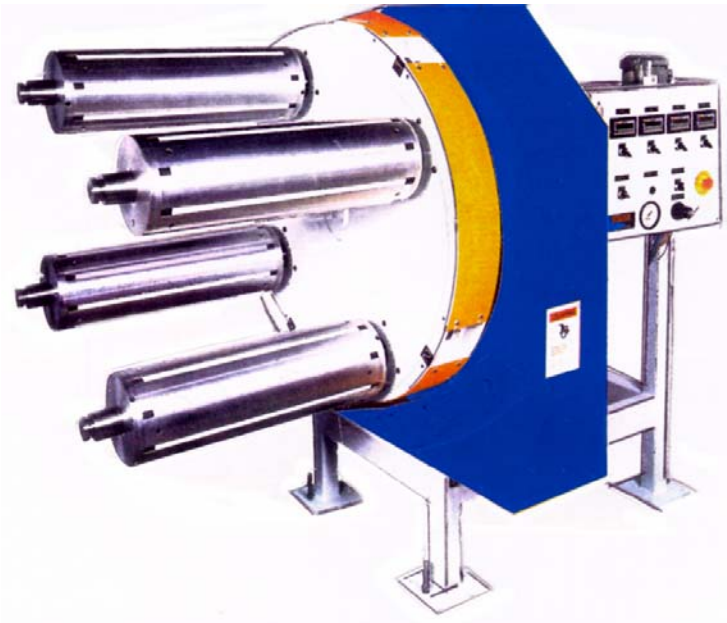

3635 Afton Road
San Diego, CA 92123
Phone: 858-292-1212
Fax: 858-292-4635
Email: info@centurydesign.com



VISIT OUR WEBSITE at:

www.centurydesign.com